



# POLYMER INDUSTRIES

GEARED TOWARDS EXCELLENCE


## POLYSLICK® MARINE



Ultra High Molecular Weight Polyethylene Fendering



Fender Pads

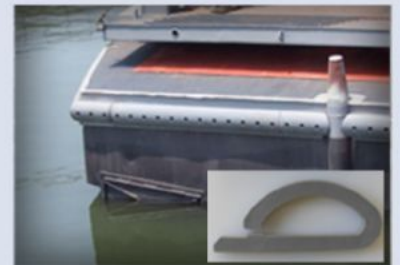

Flexi Fend®

U.S. Patent Nos. 6,832,570 /  
6,948,440 / 7,624,694 / 8,029,209



Pileguard

## APPLICATIONS

Dock Facings

Bridge Fenders

Boat Rails and Gunnels

Canal Lock Door Panels

Lock and Dam Guidewall

Dry Dock Walls and Side Rails

Pile Facings

Gate Fenders

Floating Docks

Pipeline Fenders

Wharf, Pier and Lock Fenders

Offshore Pump Station Fenders

Rub Rails

Sliding Pads

Pier Protection

Guide Rollers

Canal Lock Walls

Keel and Bilge Block Facings



**POLYSLICK®**  
**MARINE**



## UHMW-PE DOCK FENDERS AND FENDER PADS

### FEATURES

Impact resistant  
Abrasion resistant  
UV protected  
Will not corrode, rot or splinter

Resists marine borers and barnacle growth  
Non-sparking  
Can be drilled, chamfered and fabricated to meet customer specifications

### COLORS

Black                      Yellow  
Custom Colors

### SIZES

Thickness                      inch / mm  
0.125 to 10 / 3 to 250



## UHMW-PE FLEXI FEND®

### FEATURES

Non-marking  
Non-grabbing  
Absorbs energy  
Impervious to salt water and oil  
Leaf shape allows it to flex with impact and return to shape with no permanent damage

High visibility  
Easy installation  
Eliminates paint or tape  
Will not corrode, rot or splinter  
US patent nos. 6,832,570 / 6,948,440 / 7,624,694 / 8,029,209

### COLORS

Black                      Gray  
Custom Colors

### SIZES

| T x H x W | inch / mm                          | inch / mm                         |
|-----------|------------------------------------|-----------------------------------|
|           | 0.25 x 4 x 2.13 / 6 x 100 x 53     | 0.5 x 10 x 4.2 / 12 x 250 x 105   |
|           | 0.375 x 4 x 2.13 / 9.5 x 100 x 53  | 0.625 x 10 x 4.2 / 15 x 250 x 105 |
|           | 0.375 x 10 x 4.2 / 9.5 x 250 x 105 | 1 x 10 x 4.2 / 25 x 250 x 105     |



## UHMW-PE PILEGUARDS

### FEATURES

Impact resistant  
Abrasion resistant  
UV protected  
Will not corrode, rot or splinter

Resists marine borers and barnacle growth  
Non-sparking  
Can be drilled, chamfered and fabricated to meet customer specifications

### COLORS

Black                      Yellow  
Custom Colors

### SIZES

Thickness                      inch / mm  
1.25 / 32  
Width x Length                      12 x Up to 30 feet / 300 x Up to 9 meters



## UHMW-PE CUSTOM FENDERS

Fenders can be fabricated, heat or cold formed to customer specifications.  
Custom colors and formulations available.

Distributed by:

## POLYMER INDUSTRIES

**HEADQUARTERS:** PO Box 32; 10526 AL Hwy 40 Henagar, AL 35978 USA **Ph:** (256) 657-5197 **Fax:** (256) 657-5189 **Toll Free:** (877) 489-0039  
**NYTEF DIVISION:** 633 Dunksferry Road Bensalem, PA 19020 USA **Ph:** (215) 638-0800 **Fax:** (215) 638-7674  
**AVALANCHE LINER DIVISION:** 3273 West 5th Court Oxford, WI 53952 USA **Ph:** (608) 586-5100 **Fax:** (608) 586-5175 **Toll Free:** (877) 522-2382  
**ULTRAPOLY DIVISION:** 2404 Center Street Tacoma, WA 98409 USA **Ph:** (253) 272-1217 **Fax:** (253) 272-1457 **Toll Free:** (800) 872-8469  
**WEST COAST DISTRIBUTION:** 4419 West 1980 South Salt Lake City, UT 84104 USA **Ph:** (801) 363-3109 **Fax:** (801) 364-4381 **Toll Free:** (800) 872-8469  
**MIDWEST DISTRIBUTION:** 694 Veterans Pkwy Bolingbrook, IL 60440 USA **Ph:** (800) 646-9833 **Fax:** (630) 296-3011  
**NYTEF WEST COAST DISTRIBUTION:** 13185 Imperial Highway Whittier, CA 90605 USA **Ph:** (562) 946-8723 **Fax:** (562) 946-4497  
**ASIA PACIFIC:** Plot No.'s 160 c/o & 161 c/o Cherlapally Ida Phase II HCL Post Office Hyderabad - 500 051 India **Ph:** 91 40 2726 3375 **Fax:** 91 40 2726 1219

Rev 4